




Stat. "D"
d. max 88,9

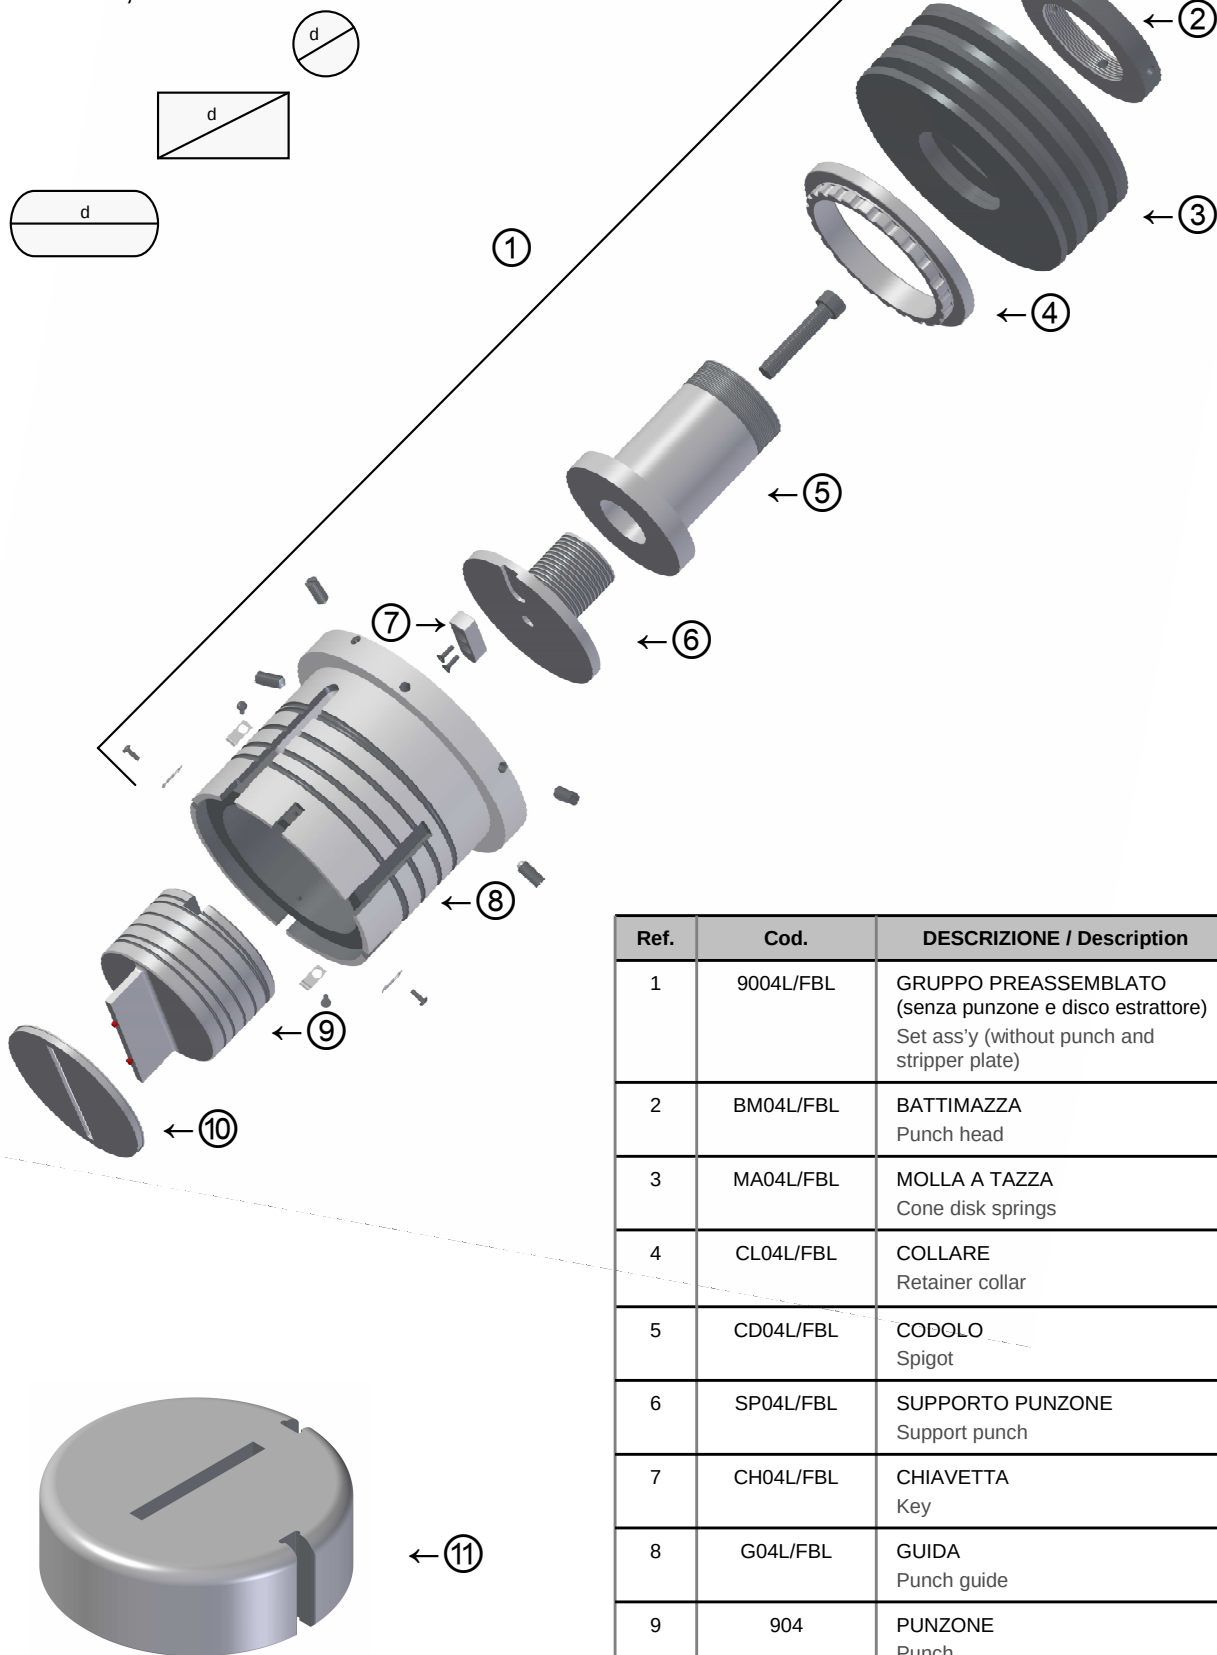

Ref.	Cod.	DESCRIZIONE / Description
1	9004L/FBL	GRUPPO PREASSEMBLATO (senza punzone e disco estrattore) Set ass'y (without punch and stripper plate)
2	BM04L/FBL	BATTIMAZZA Punch head
3	MA04L/FBL	MOLLA A TAZZA Cone disk springs
4	CL04L/FBL	COLLARE Retainer collar
5	CD04L/FBL	CODOLO Spigot
6	SP04L/FBL	SUPPORTO PUNZONE Support punch
7	CH04L/FBL	CHIAVETTA Key
8	G04L/FBL	GUIDA Punch guide
9	904	PUNZONE Punch
10	E04	DISCO ESTRATTORE Stripper plate
11	404	MATRICE Die

© 2014



Ciemme
s.r.l.

Via Masaccio n.24 - 56010 - Lugnano (PI) - Italy
Tel.050/703321 - 703411 Fax 050/703322
www.ciemmegi.it E-mail: cmg@ciemmegi.it






Note tecniche:

- Recupero affilatura rapido senza ausilio di chiavi , regolazione minima 0,1 mm.
- Guide temprate , rinvenute , trattate con riferimenti standard $0^\circ/90^\circ/135^\circ$
- Matrici antisfrido secondo richiesta , riferimenti standard $0^\circ/90^\circ - 0^\circ/135^\circ$
- Sedi delle chiavette sulle matrici con fondo raggiato per eliminare possibili inizi di cricature
- Punzoni in acciaio HSS temprati.

Su richiesta :


- Versione per macchine con lubrificazione automatica
- Riferimenti speciali
- Punzoni in acciaio SSK per lavorazioni gravose
- Rivestimenti TIN - TIALN
- Versione con taglio-punzone guidato per dimensioni di taglio molto ridotte a rischio di rottura

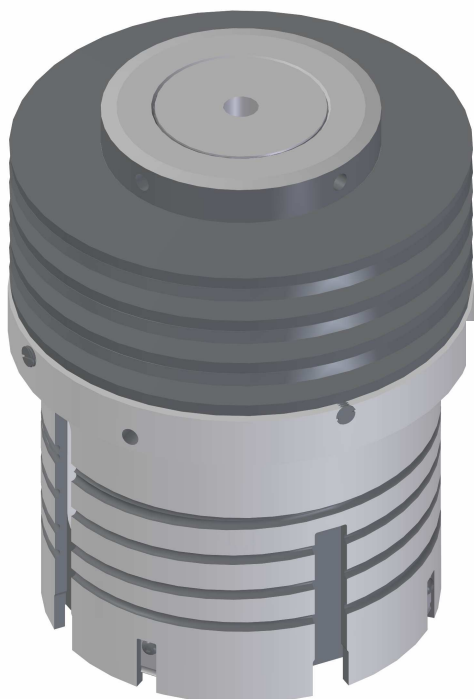

Stat. "D"

Art. 9004L/FBL - 404

Ø max 88.9

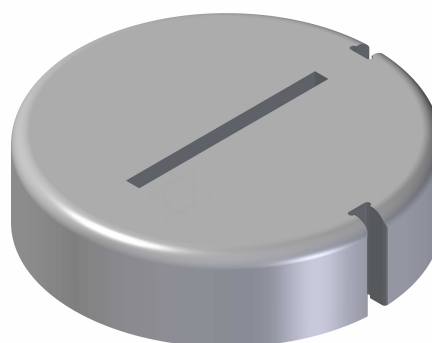

Technical notes:

- Fast sharpening recovery without wrenches, min. adjustment 0,1 mm.
- Hardened, tempered guides with standard references $0^\circ/90^\circ/135^\circ$
- Anti-scrap dies as per request, standard references $0^\circ/90^\circ - 0^\circ/135^\circ$
- Keyways on the dies with rayed bottom in order to avoid initial cracking.
- Hardened HSS punches.

On request :

- Version for machines with automatic lubrication
- Special references
- Special SSK punches for heavy workings
- TIN –TIALN coatings
- Version with guided punch cutting for very small cutting dimensions in order to avoid breakings

